



QTR-TURN™ CONVERTIBLE RETAINING RING PLIERS

OPERATE BOTH INTERNAL
AND EXTERNAL RINGS

To change from Internal to External, rotate "T" knob one quarter turn; pull handle halves apart and re-install in other hole.

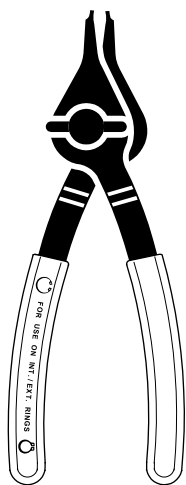

INTERNAL

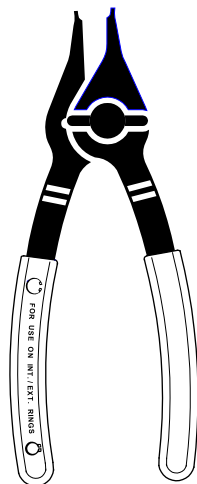

EXTERNAL

SPECIAL FEATURES

- Quick easy conversion
- Maximum stability – pliers stay tight
- Comfort cushion grip

RETAINING RING PLIERS INSTRUCTIONS



WARNING: ALWAYS WEAR SAFETY GOGGLES
WHEN USING THESE TOOLS

1. Loosen ring first with punch or similar tool to remove bond from rust and accumulated dirt.
2. Use largest tip pliers that will fit in holes of ring.
3. Push tips as far into ring holes as possible before squeezing handles.
4. Use minimal pressure to remove or install ring.
5. Never use your pliers for anything other than installing and removing retaining rings.

SEE REVERSE SIDE FOR RING CAPACITIES PER PLIERS SIZE.

Made in USA with US and globally sourced components.
Products are designed, engineered and quality tested in the USA.